

AUKS
AIR CONDITIONER

شرکت زمهریرکیش
ZAMHARIR KISH CO.



Rooftop Packaged Unit



AUKS

AIR CONDITIONER

Table of Contents

About Amrta	01
Structure	02
Benefits	02
Features	02
Options	05
Performance table	06
Optional function	09
Standard dimensions	14
Installation, operation and maintenance	16
Product series	17



About

At Amrta, we are about designing and manufacturing highly efficient, reliable and customer-focused products.


We have one of the stringent control mechanisms in place for manufacturing processes and product quality.

Amrta always works closely with customers. We continually strive to meet the customer's demands and listen to the ideas through our distributors.

We are determined to keep on our endeavor and commitment in technology progression and product improvement, by working together with our customers and distributors in its task of offering solutions in environmental technologies with highest innovation, dependability, quality and energy efficiency.



Structure

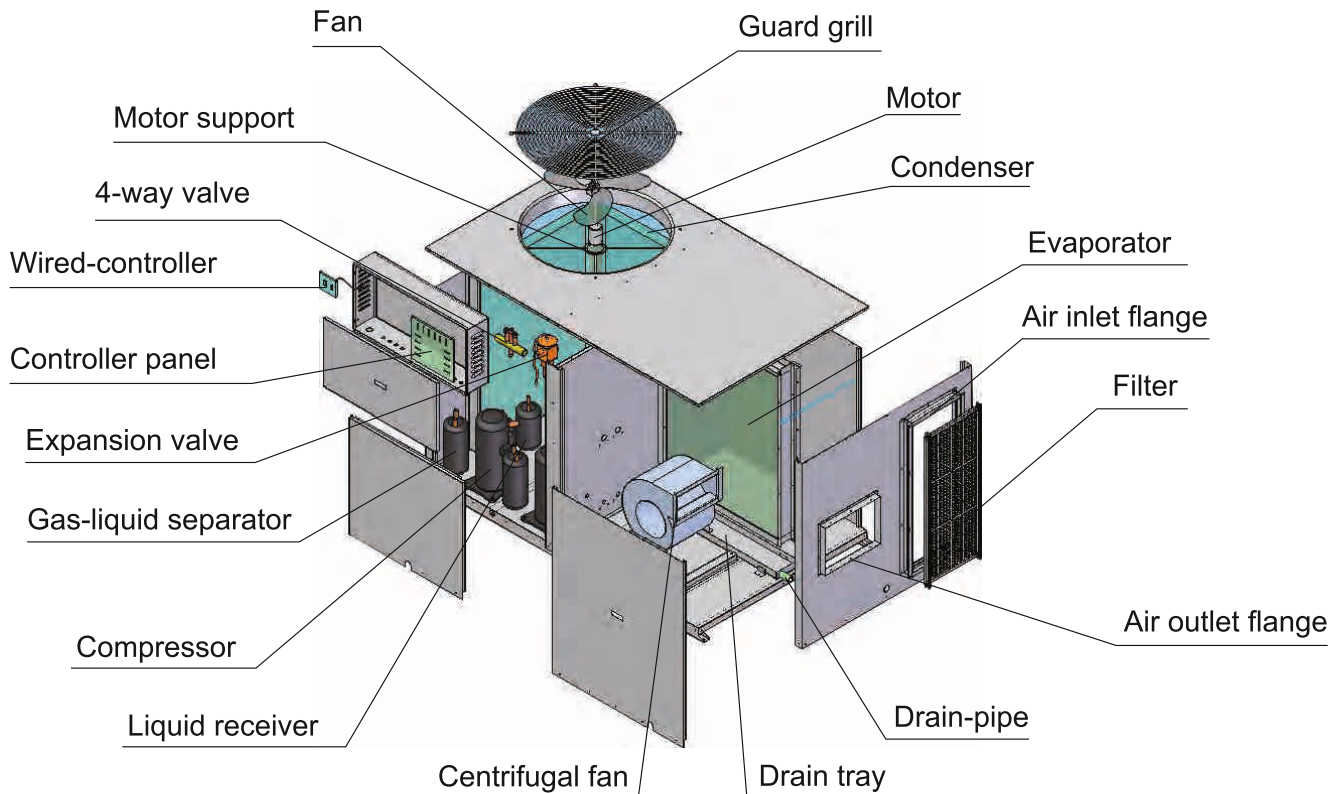

Benefits

Packaged design

The compact design gives an aesthetic and neat appearance when installed in line of sight. Compact size benefits transport, handling and positioning on site, simplified and cheaper than traditional units.

Reliability

All products are rigorously factory tested to ensure the top arrived condition in site. The strict testing procedure includes rain test, shipping test, shake and drop test, rigging test, coil leak test, and the whole unit running test. All units are fully factory tested; plug and play for the easier installation in site by reducing any unnecessary costs. This is one of the Amrta's rigorous requirements of responsibility to customers to make sure the reliability of our products.

Durability

Cabinets are constructed from galvanized steel with polyester powder coated for all weather protection. The outdoor air coils' aluminum fins could be epoxy coated for extra protection in corrosive environments, for example the salt laden sea air. External fasteners are made by stainless steel or galvanized steel as well as the corrosion resistant drain trays. 10 years anti-corrosion warranty is guaranteed.

Flexibility

The dedicated vertical or horizontal supply/return configurations allow easy utilization on replacement jobs or new construction applications. Unit may be configured to precisely match the building requirements through the use of factory-installed options such as: integrated economizer, power air exhaust, high static pressure indoor fan and coil protection options.

Economy

2-4 stages operation compressors are progressively switched on only as they are needed. This has the added advantage of lowering start-up current. Especially, economizer such as free cooling or heat recovery option helps to reduce the operating costs.

Safety

The refrigeration system operates with a number of protection means: dry-filter, discharge temperature protector, liquid sight glass, HP and LP switches, phase sequence relay, circuit breaker and contactor etc.

Low noise

Electrical and compressor section are insulated to reduce noise. The upward discharge of condensing fans carries away effectively the operating noise. And all compressors and fans are mounted on rubber anti-vibration supports for quiet design.

Easy maintenance

The condenser and evaporator fan motor bearings are permanently lubricated with long life, and no annual maintenance need, adding greater reliability to the unit. The service access ports are protected, externally mounted, re-usable, provided on both the high and low lines for ease of evacuating and charging the system. A large, single panel covers the electrical controls makes servicing easy. The blower compartment has a large panel which will allow the blower fan assembly to slide-out for ease of maintenance and trouble shooting.

Features

Casing

Panels are made by galvanized steel with polyester powder paint for excellent finish, weatherability and corrosion resistance. The pre-treated galvanized steel provides a better paint to steel bond, which resists corrosion and rust creep. Special primer formulas and matted-textured finish insure less fading when exposed to sunlight. The stainless steel screws are used throughout to further reduce possibility of rusting.

Compressor

The units use high efficiency, hermetically sealed, compressors, oil return lubrication and rubber vibration damper. The thermal overload cut-out, phase sequence relay and crankcase heater are integrated as the security protection to enhance reliability and performance.



Heat exchanger

Condenser/ evaporator coils are manufactured from seamless inner grooved copper tubes with all joints brazed mechanically bonded to aluminum fins to ensure optimum heat transfer. The standard feature represent by $\Phi 9.52\text{mm}$ tubes and high hydrophilic blue aluminum fins. All coils are tested at 30kg/cm^2 (450 Psi) air pressure to avoid leakage.



External thermal expansion valve

Independent thermal expansion valve with external balance offers better refrigerant control and wider load condition.


Condenser fan

Condenser fans are direct-driven axial type, air-discharged vertically with a low level noise, which use aluminum blades riveted with corrosion resistant steel spider bracket to allow a statically balanced and smooth operation. All condenser fans are protected by wire guards, and fans motors are secured by permanently lubricated bearings against overload conditions.



Centrifugal fan

Belt-drive centrifugal fans of air supply section are designed with forward-curved blades, ac asynchronous induction motors and multi-speed control for maximum efficiency and adequate airflow distribution. Motors are highly efficient inducted, with class B insulation to ensure quiet operation and smooth performance. VFD drive modulating and upgrade plug-fan are possible as option.

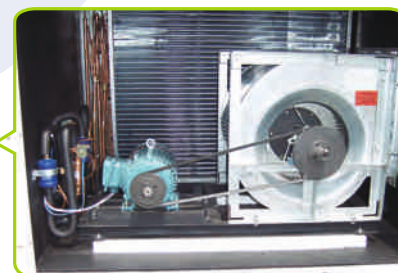

Filter

5 mm thickness washable Nylon filter is used as standard feature. G4 filter is available optionally.

Electric components

- Direct-on-line starting contactor for the compressors and condenser fan motor.
- Internal thermal protector for compressor and fan motor.
- Anti-recycling protection (time delay) for compressors through microprocessor.
- Crankcase heater for compressor.
- Control circuit breaker and power circuit breaker.
- Phase sequence relay

Defrost

Dynamic and alternate defrost function is provided to heat pump rooftop units to ensure efficient operation in winter. Units start defrost cycle when the ambient temperature is below a set temperature and repeat the defrost cycles periodically. The defrost cycle is automatically controlled by outdoor sensor. The timing and duration of defrost can be set up by a combination of timing functions on the control device.

Control

Amrta standard controller provides unit control for heating, cooling and ventilation utilizing input from indoor and outdoor sensors. Quality and reliability are enhanced through the smart control and logic for:

- Anti-short cycle timer prevents the unit from short cycling, considerably improving compressor life
- Optional soft start avoids electrical “spikes” by using staging on fans, compressors and heaters
- Interoperability with Modbus protocol allows to integrate with BMS for outstanding control benefits
- Automatic lock out system on failure and reset by interruption of power supply.
- Automatic defrost
- Compressor lead-lag operation to ensure longer life for the compressors and equal running hours between compressors
- External remote ON/OFF button for remote operation of the unit using external ON/OFF switch or connection to BMS
- High and low pressure safety switch (capsule type, factory Pre-set)
- Remote standard control panel with the same functions as the unit on-board control panel at a distance of 20 m

Options

- | | | |
|-------------------|-------------------------|--------------------------|
| ✧ Heat recovery | ✧ Hot water coil | ✧ Medium and HEPA filter |
| ✧ Fresh air | ✧ Electrical heater | ✧ Plug-fan |
| ✧ Economizer | ✧ Roofcurb | ✧ Emergency switch |
| ✧ Free-cooling | ✧ Gas burner | ✧ Siemens PLC controller |
| ✧ Explosion proof | ✧ T3 tropical condition | ✧ Carel controller |

Performance table

Technical data R410A							
Model		RTU12	RTU15	RTU18	RTU24	RTU30	RTU35
Cooling capacity	kW	12	15.2	17.5	24	30.3	35.6
Heating capacity	kW	13.2	16.6	18.4	26.5	33.3	37.7
Power supply		380V / 3Ph / 50HZ					
Cooling power input	kW	4.1	5.3	5.5	8.8	11.3	12.3
Heating power input	kW	3.8	4.8	5.1	8.2	10.4	11.3
Start current	A	48	62	63	63	74	76
Working current in cooling	A	7.4	9.7	10.2	16.1	21.2	23.3
Working current in heating	A	6.9	9.2	9.7	15.1	20.1	22.2
Throttle methods		Thermal expansion valve					
Circuits		1	1	1	1	2	2
Refrigerant		R410A					
Comp.	Type	Scroll type		380V / 3Ph / 50HZ			
	Qty	1	1	1	1	2	2
Condenser side							
Condenser	Type	Al+copper tube					
	Qty	1	1	1	1	1	1
Axial fan	Drive	Direct drive					
	Motor power	kW	0.25	0.37	0.37	0.55	0.75
	Air flow	m ³ /h	4600	7800	7800	9000	12600
Evaporator side							
Evaporator	Type	Al+copper tube					
	Qty	1	1	1	1	1	1
Centrifugal fan	Motor power	kW	0.32	0.37	0.45	1.1	2.2
	Air flow	m ³ /h	2100	2600	3400	4100	5200
	Drive	Direct drive			Belt drive		
External static pressure (Pa)		100	100	100	200	200	250
Filter		Aluminum frame filter G3					
Noise level dB(A)		67	67	68	71	72	72
Dimension	L	mm	1410	1410	1410	1978	1978
	W	mm	1100	1100	1100	1175	1175
	H	mm	1095	1095	1095	1095	1095
Weight	kg	240	260	290	420	480	500

Performance table

Technical data R410A							
Model		RTU45	RTU50	RTU60	RTU72	RTU90	RTU105
Cooling capacity	kW	44.5	50	60	70	90	105
Heating capacity	kW	48.7	54.3	64	75.4	96.2	113.2
Power supply		380V / 3Ph / 50HZ					
Cooling power input	kW	17	19.5	22.8	26.7	32.9	39.7
Heating power input	kW	15.6	18	21	24.8	30.4	36.7
Start current	A	168	186	175	199	197	266
Working current in cooling	A	31.7	35.6	39.9	48.3	61	70.6
Working current in heating	A	29.9	33.5	37.5	45.4	57.3	66.3
Throttle methods		Thermal expansion valve					
Circuits		2	2	2	2	3	3
Refrigerant		R410A					
Comp.	Type	Scroll type 380V / 3Ph / 50HZ					
	Qty	2	2	2	2	3	3
Condenser side							
Condenser	Type	Al+copper tube					
	Qty	1	1	1	1	2	2
Axial fan	Drive	Direct drive					
	Motor power	kW	1.1	1.5	1.5	2.2	2x1.1
	Air flow	m ³ /h	16500	21000	21000	27000	33000
Evaporator side							
Evaporator	Type	Al+copper tube					
	Qty	1	1	1	1	1	1
Centrifugal fan	Motor power	kW	3	3	4	4	5.5
	Air flow	m ³ /h	7600	8500	10900	12500	16000
	Drive		Direct drive			Belt drive	
External static pressure(Pa)		250	250	300	300	300	300
Filter		Aluminum frame filter G3					
Noise level dB(A)		73	73	73	75	74	75
Dimension	L	mm	2268	2268	2298	2298	2878
	W	mm	1440	1440	1650	1650	2140
	H	mm	1167	1167	1400	1400	1964
Weight	kg	750	770	830	860	1160	1350

Performance table

Technical data R410A

Model			RTU120	RTU140	RTU150	RTU180	RTU210	RTU300
Cooling capacity		kW	120	140	149	180	210	298
Heating capacity		kW	128.3	150	159.2	192.5	226	318
Power supply					380V / 3Ph / 50HZ			
Cooling power input		kW	45.1	55.7	55.1	69.9	83	106.7
Heating power input		kW	41.7	51.8	51.5	64.8	77	100
Start current		A	218	252	323	232	301	415
Working current in cooling		A	82.4	101.4	100.2	130.9	151	192.3
Working current in heating		A	77.4	95.7	95.1	123.5	142.3	184.3
Throttle methods					Thermal expansion valve			
Circuits			4	4	2	6	6	4
Refrigerant					R410A			
Compressor	Type	Scroll type			380V / 3Ph / 50HZ			
	Qty	4	4	2	6	6	4	
Condenser side								
Condenser	Type	Al+copper tube						
	Qty	2	2	2	4	4	4	
Axial fan	Drive	Direct drive						
	Motor power	kW	2x1.5	2x2.2	2x2.2	4x1.1	4x1.5	4x2.2
	Air flow	m³/h	42000	54000	54000	66000	84000	108000
Evaporator side								
Evaporator	Type	Al+copper tube						
	Qty	1	1	1	1	1	1	
Centrifugal fan	Motor power	kW	7.5	11	11	15	15	18.5
	Air flow	m³/h	21000	25000	26000	32000	38000	54000
	Drive	Belt drive						
External static pressure(Pa)			400	400	400	500	500	500
Filter					Aluminum frame filter G3			
Noise level dB(A)			75	79	79	80	80	82
Dimension	L	mm	3626	3626	3626	4690	4690	5660
	W	mm	2200	2200	2200	2330	2330	2330
	H	mm	2047	2047	2047	2055	2055	2055
Weight		kg	1710	1820	1850	2180	2430	2860

* Performance values refer to the following conditions:

Cooling: room air temperature 27.0°C DB RH 50%, ambient air temperature 35°C;

Heating: room air temperature 20.0°C DB, ambient air temperature 7°C DB / 6°C WB.

** Noise level measured by adopting average value in the noise lab with background noise of 25 dB(A), at a distance of 1.5m high fan speed.

Optional function

Economizer and free cooling

It is one of the most important features of this rooftop as it maximise seasonal efficiency by reducing the use of thermodynamic cooling in mid season.

Thermodynamic cooling can be replaced by Free Cooling when outdoor temperature is below the building set point saving up to 15% on annual energy consumption.

Rooftop units are supplied with economizer and fresh air hood to improve comfort through better fresh air management and allow energy savings with free cooling.



Exhaust air

Gravity exhaust damper


Gravity exhaust damper Installed with economizer assembly, gravity exhaust damper relief pressure when outside air is being introduced in the system. It is a cheap and smart way to avoid over pressure in a building.

Power exhaust fans


Installed with economizer assembly, it provides exhaust air pressure relief when high levels of fresh air are being introduced in the system.

Interlocked to run when return air dampers are being closed and supply air blower is in operation. The extraction fans run when outdoor air dampers are at least 50% open (adjustable). It is also overload protected. A gravity exhaust damper is supplied with this option to prevent air from entering the unit during shutdown. The power exhaust fans have been size to exhaust 50% of the nominal air flow of the unit.


Cooling/heating mode without fresh air

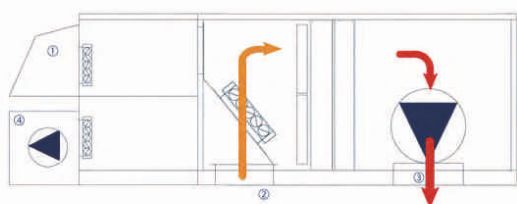

Free-cooling mode

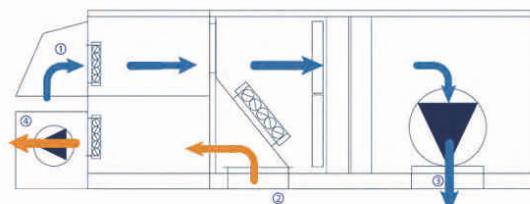

Cooling/heating mode with fresh air

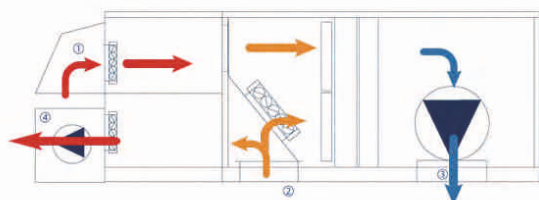

- ① Fresh air ② Return air ③ Supply air ④ Exhaust air

Heat recovery



Improvement of indoor air quality is one of the major missions of air conditioner equipment. To introduce the ambient fresh air into the building is an ecological and effective solution which is mandatory to control indoor CO² level and comfort. Amrta air to air HR system offers a parfait energy recovery solution by absorbing heat from the exhaust air in order to pre-treat the fresh air to achieve at the same time:



- A high performance of the improvement of indoor air quality and comfort.
- A economical operation for remarkable energy saving.

Two types of HR equipment are available according to the project requirement: Plate heat exchanger or Wheel heat exchanger. Although the use of the HR system maybe increase some of energy consumption of fans, but the benefit of energy saving will be certainty greater than that. The test data prove that the performance of heat recovery can be up to 70% for recovery efficiency and 100% for volume of exhaust air.

The HR system is now widely applied in residential, commercial, industrial applications. Practically, applications which demand the higher quality air and fresh air rate are strongly recommended.




Heat recovery diagram

Plate heat recovery

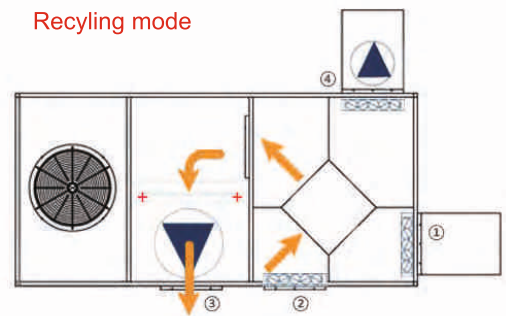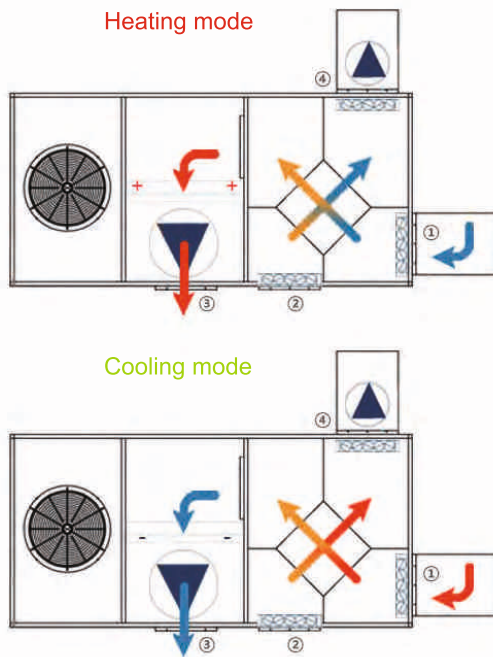

① Fresh air ② Return air ③ Supply air ④ Exhaust air

Wheel heat recovery

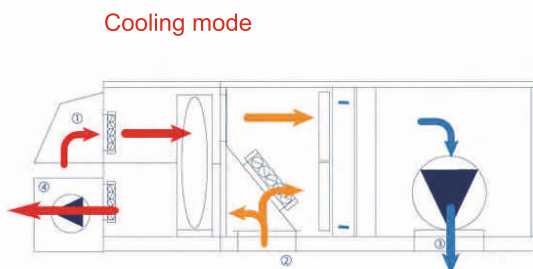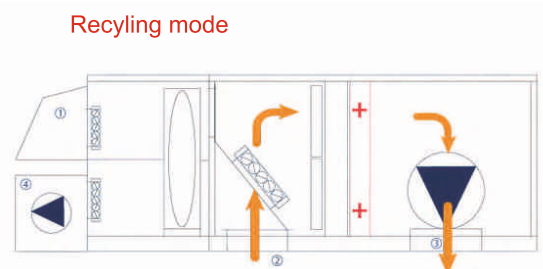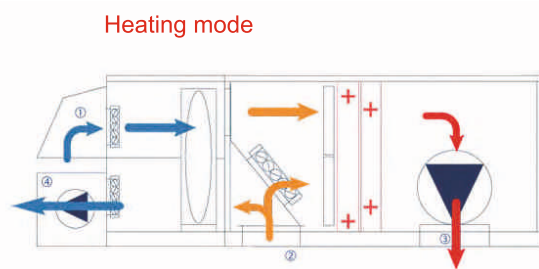

① Fresh air ② Return air ③ Supply air ④ Exhaust air

Heating possibilities

Electric heater

The electric heater comprises of shielded resistance heaters, which are smooth stainless steel tubes 6 W/cm² capacity. High temperature limit control offers overload protection and is set to 90°C and located at less than 150mm after electric heaters. This is provided as a standard feature on the electric heater, with the electric power supply cables made of reticulated silicon rubber, resistant to temperatures up to 200°C. For any rooftop unit size, three sizes of electric heater are available, S (standard), M (Medium) and H (high).



Hot water coil

Hot water coils offer fully modulating control through the use of a 3 way valve. The hot water coil, connections and valves are all tested at pressure of 15 bars. Frost protection is provided by forcing the opening the 3 way valve when supply temperature from hot water coil falls below 8°C and by stopping the outdoor fan when that supply temperature falls below 6°C. In addition to that, the 3 way valve is also opened at 10% value if the outdoor temperature falls below an adjustable value.

Hot water coils are always factory fitted, wired and fully tested, prior to shipment.

Explosion proof

Designed for Group II A, IIB, IIC.
Designed for Temperature classes T1-T6.
Designed for Explosive atmosphere Zone1, Zone2.
Designed for petroleum exploitation, refinery, storage, chemical, medicine, military facilities, etc.
Efficient energy saving and low noise.
Single refrigeration type and refrigeration & heating type.
Explosion-proof mark: EXdemib II BT4, EXdemia II CT4.



Gas burner




Amrta rooftop units can be fitted with a gas burner. As one of the auxiliary heating devices, it allows the rooftop units to heat without running the refrigeration system or only with a part of it to achieve a high performance of energy-saving at lower ambient temperature in winter and to reduce massively the heating operating costs specially for where the natural gas is cheaper than electricity.

The gas heating modular use a safe and reliable atmospheric gas burner made of aluminized steel tube heat exchanger designed to offer maximum heat transfer and 92% efficiency (PCI%). It runs with natural gas in an operating range of 1.3-2.6KPa. The standard gas module offers 2 stages of control which helps in improving space comfort by avoiding large supply air temperature deviations. The airflow rate in the burner is controlled as the gas flow is being reduced maintaining the burner to its highest efficiency level.


S: 30kW
M: 50kW
L:100kW

3 modules are available, which can provide separately 30kW, 50kW and 100kW heating capacity in standard working condition according to your different heating requirements. Where more capacity is required a modulating version is available with flexible combination. For safety reasons, the rooftop unit with gas heating can't be installed inside a technical room.


RTU90-105

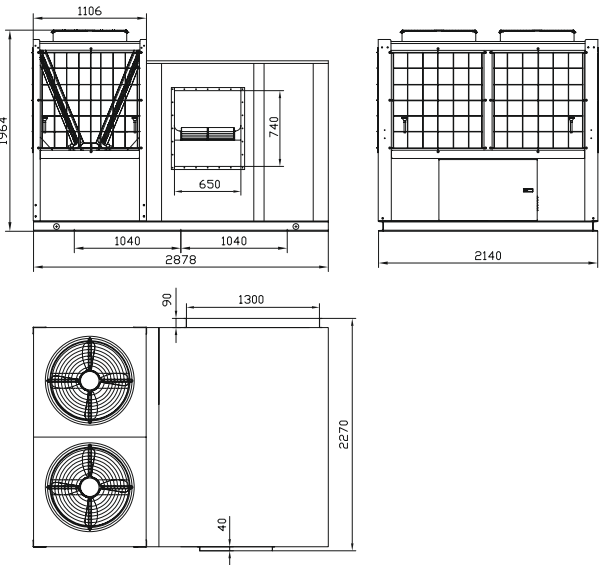


RTU120-150

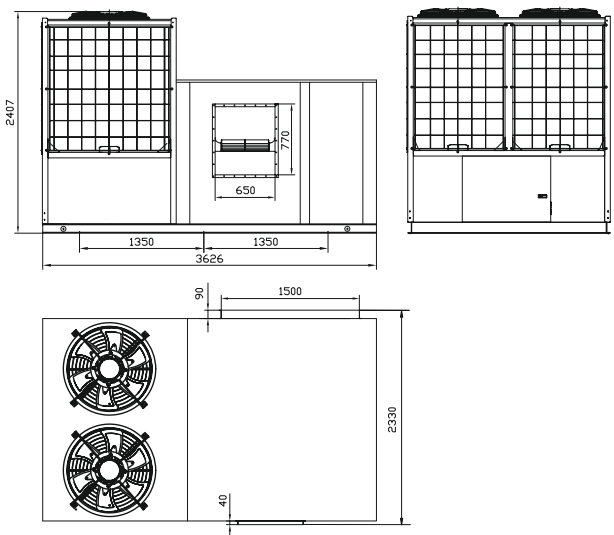


RTU190-210

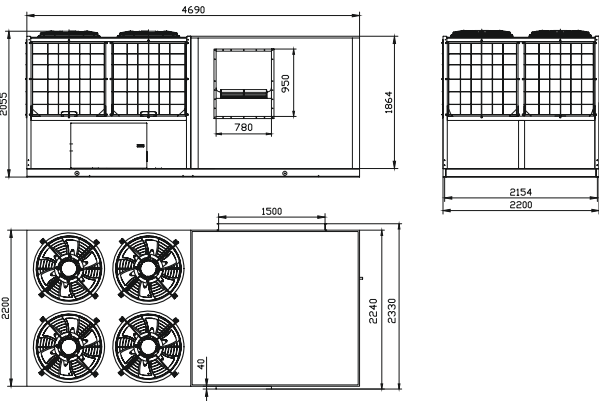


RTU300

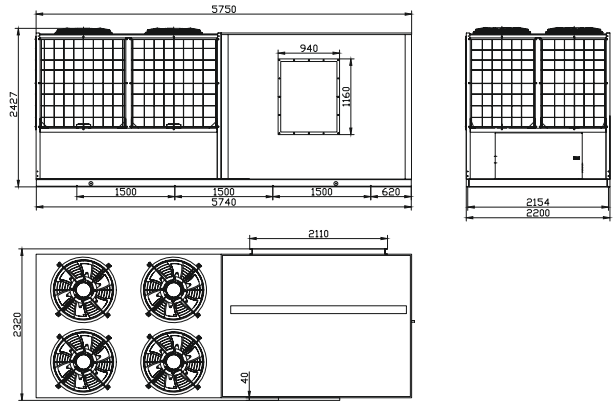


RTU90-105

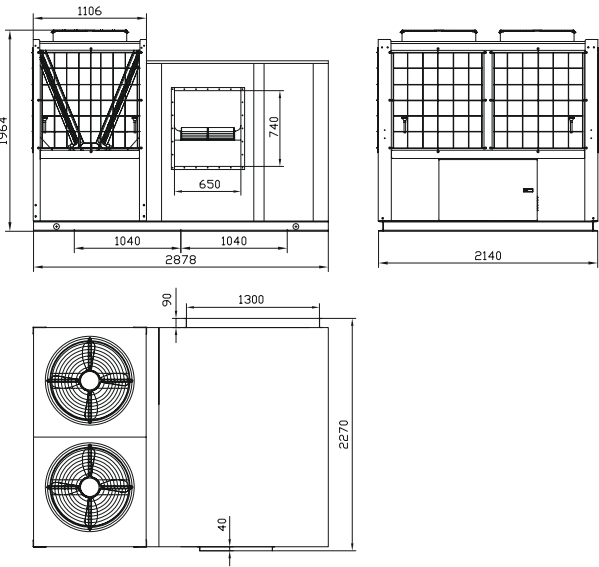


RTU120-150

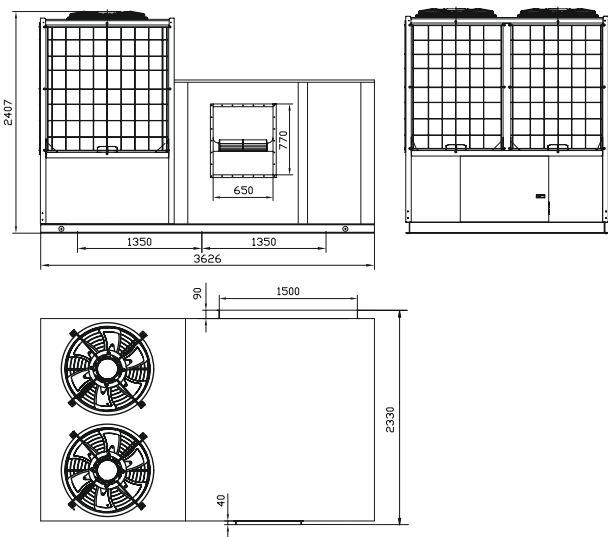

RTU190-210

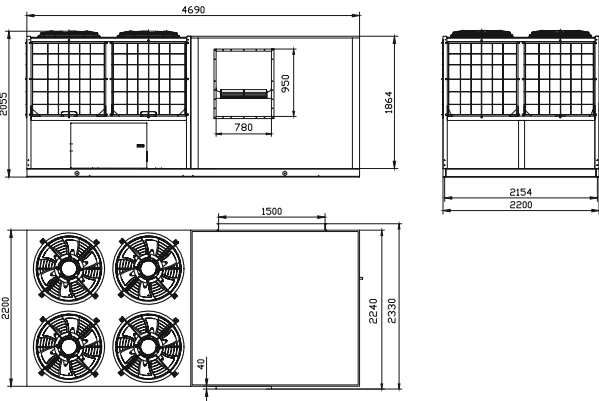

RTU300

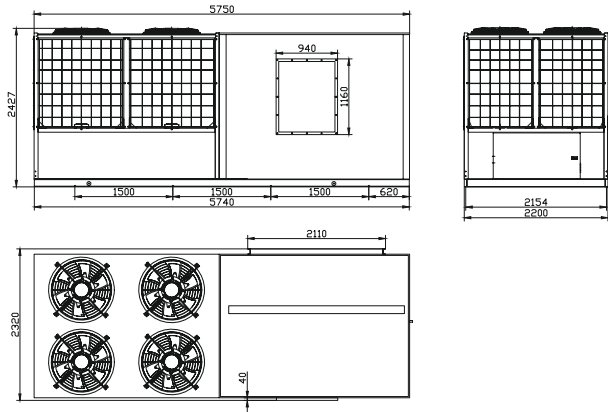


Installation, operation and maintenance

Installation

Amrta equipment has been designed for quick and easy installation.

Unit location

The electric unit is designed only for outdoor installations. Choosing the location of the unit should be based on minimizing the length of the supply ducts. Consideration should also be given to availability, service access, noise, and shade. The unit installation shall avoid areas where condensate drainage may cause problems.

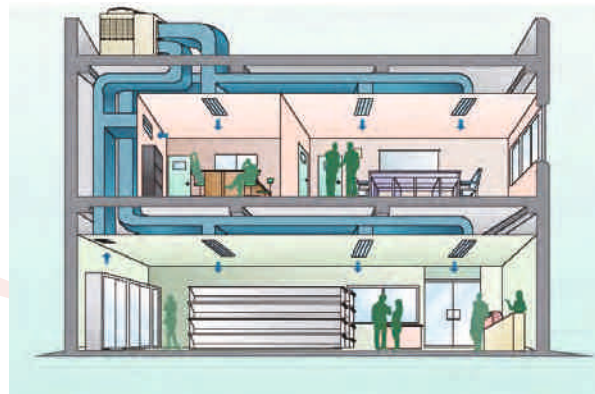

Setting the curb

Make openings in roof decking large enough, to allow for duct penetration and work space only. Do not make openings large than necessary. Set the curb to coincide with the openings. Make sure the curb is level. Unit must be level in both horizontal axes to support the unit and reduce noise and Vibration.

Electrical

All electrical work must be carried out by a qualified and licensed electrician. Then installation must comply with the current relevant standards wiring rules and local authority requirements. Wire sizing is the responsibility of the installer, as it depends on the conditions and regulations applicable to each installation site. Refer to the electrical drawing and specification of the unit for the electrical data. The electrical installation requirements are generally as follows:

- The air-conditioning unit shall be supplied directly from a distribution board through a mains lockable isolating switch.
- Pre-punched holes have been provided in the unit casing for the isolating switch. Do not drill into the cabinet as piles may be located behind.

Operation

Unit operations should be controlled with thermostat, or unit controller, never at the main power supply, except for servicing, emergency, or complete shutdown of the unit.

Maintenance

At least once each year, a trained, qualified service technician should check out the unit. Fans, evaporator coils, and filters should be inspected at least monthly.

Product series

Air cooled mini chiller



Air cooled modular chiller



Air cooled screw chiller



Rooftop packaged unit



Tent packaged unit



Water cooled packaged unit



Water cooled scroll chiller



Water cooled screw chiller



Water chilled fan coil unit





AUKS

AIR CONDITIONER

آدرس کارخانه: کیش، فاز ۳ صنعتی، خیابان فناوری قطعه B ۸۴
تلفن: ۴۴۴۹۰۰۵۰ - ۴۴۴۹۰۰۶۰ (۰۷۶)

دفتر مرکزی فروش: تهران، سه راه امین حضور
مجتمع خلیج فارس، طبقه ۴، واحد ۴۰۳
تلفن: ۸۱ - ۴۷۷۸ ۴۷۵۴
فکس: ۳۳۵۴۶۳۳۴
کیش: مجتمع پادنا، غرفه BG40 ۴-۴۴۴۲۵۷۷۲-۰۷۶